



Test Result Indications




Nine Test Lights for Wrist Strap and Foot Wear testing (3 Pass Green, 3 Fail Low & 3 Fail High)




Wrist Strap PASS Resistance in range




Foot Wear PASS Resistance in range




Foot Wear FAIL Resistance High



Foot Wear FAIL Resistance Low



Wrist Strap FAIL Resistance High




Wrist Strap FAIL Resistance Low

Features

- Has 2 Test Modes:
 - Single Test Mode: Checks the ESD status of Wrist Strap or Footwear.
 - Comprehensive Test Mode: Checks the ESD status of both Wrist Strap and Footwear.
- Customer can connect it to Door Control System thru Access System Control Signal from this Tester.
- This Model uses micro-current testing for stable and accurate results.
- Low Voltage Alarm Function: when the battery goes low in this Tester, there will be alarm indication.

Specifications

| | |
|----------------------|--|
| Power supply | : 9V Battery |
| Touch-Point | : Voltage $\leq 400V$ (peak, DC or AC) |
| Switching Output | : Switch Current ≤ 130 mA Touch-Point Resistance of $< 30\Omega$ Test PASS: Touch-Point Close Test FAIL: Touch-point open |
| Accuracy | : Wrist Strap testing: $\pm 10\%$ Footwear testing: $\pm 10\%$ (100 K Ω), $\pm 20\%$ (100 M Ω), $\pm 30\%$ (1 G Ω) |
| Access Control | : $\pm 400V$ (Peak DC/AC); 100mA |
| Signal Output | : (Recommended Relay KAQW214) |
| Dimensions (approx.) | : 160 mm x 100 mm x 40 mm |
| Weight (approx.) | : 0.6 kg (Test Unit only) |

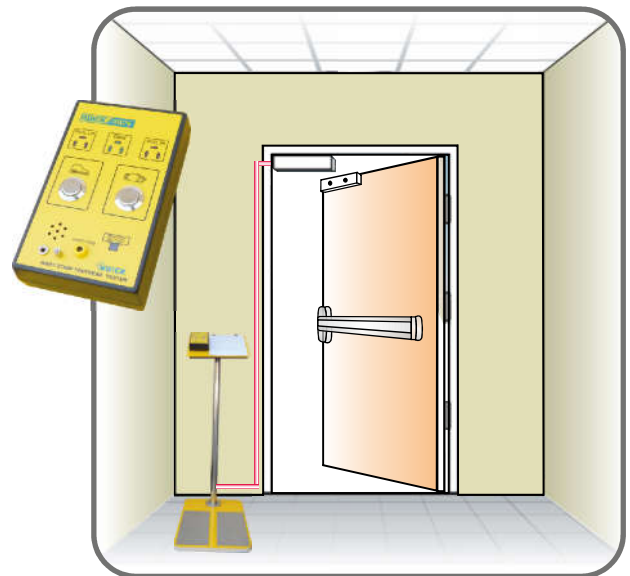

This Combo Tester can be connected to Door Control System thru Access Control System Signal from this Tester. It gives signal of $\pm 400V$ (Peak DC/AC); 100mA to operate relay (KAQW214) of Access Control System