



A range of professional quality Torque Wrenches

KRAFTWERK Electronic torque wrench with digital display features:
 - A successful combination of robust design, simple adjustments
 - Quickly reversible 36 teeth ratchet head
 - Hardened steel casing and ergonomic 2-component handle

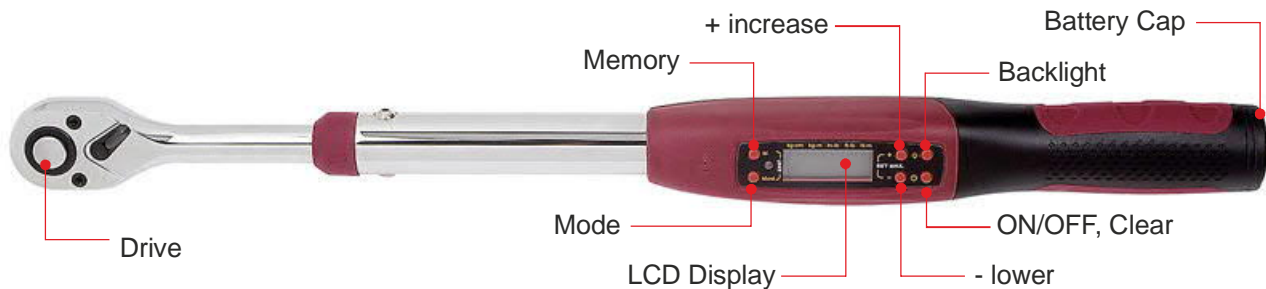

Digital Torque setting
kg-m, kg-cm, lb-in, ft-lbs



Easy change of direction
for left right rotation



Memory to store
50 torque values



Audible click & visual display
to indicate the target torque

Features of 4080 Series Electronic Torque Wrenches with Reversible Ratchet

- Torque accuracy: +/- 2% tolerance of the set scale value.
- Precise reading accuracy for a minimum 5000 tightening cycles.
- Torque setting by push buttons
- An audible click and visual display when the desired torque value is achieved.
- With exact gearing 36-teeth ratchet mechanism.
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand.
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock.
- Includes test certificate in accordance with DIN EN ISO 6789

Specifications

Parameters	Model 4080-38	Model 4080-12
Accuracy	+/-2%	+/-2%
Memory	50	50
Display Resolution	0.1	0.1
Display Range	27-135Nm (14.7-99.6 lb-ft)	40-200Nm (29.5-147.5 lb-ft)
Drive	3/8 inch	1/2 inch
Unit Selection	kg-cm, kg-m, lb-in, lb-ft, N-m	kg-cm, kg-m, lb-in, lb-ft, N-m
Length	480 mm	530 mm
Weight	1.6 kg	1.7 kg
Battery	AA x 2	AA x 2
Battery Life	110 hrs (continuous operation)	110 hrs (continuous operation)
Auto Shut-off	80 seconds (if do not use wrench)	80 seconds (if do not use wrench)

shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.