


Normally immediate delivery • Spare Heating Element & Motor available

Suitable for drying, curing & ageing applications in industry and research institutes

Designed for high efficiency and safe working • Has superior Temperature uniformity

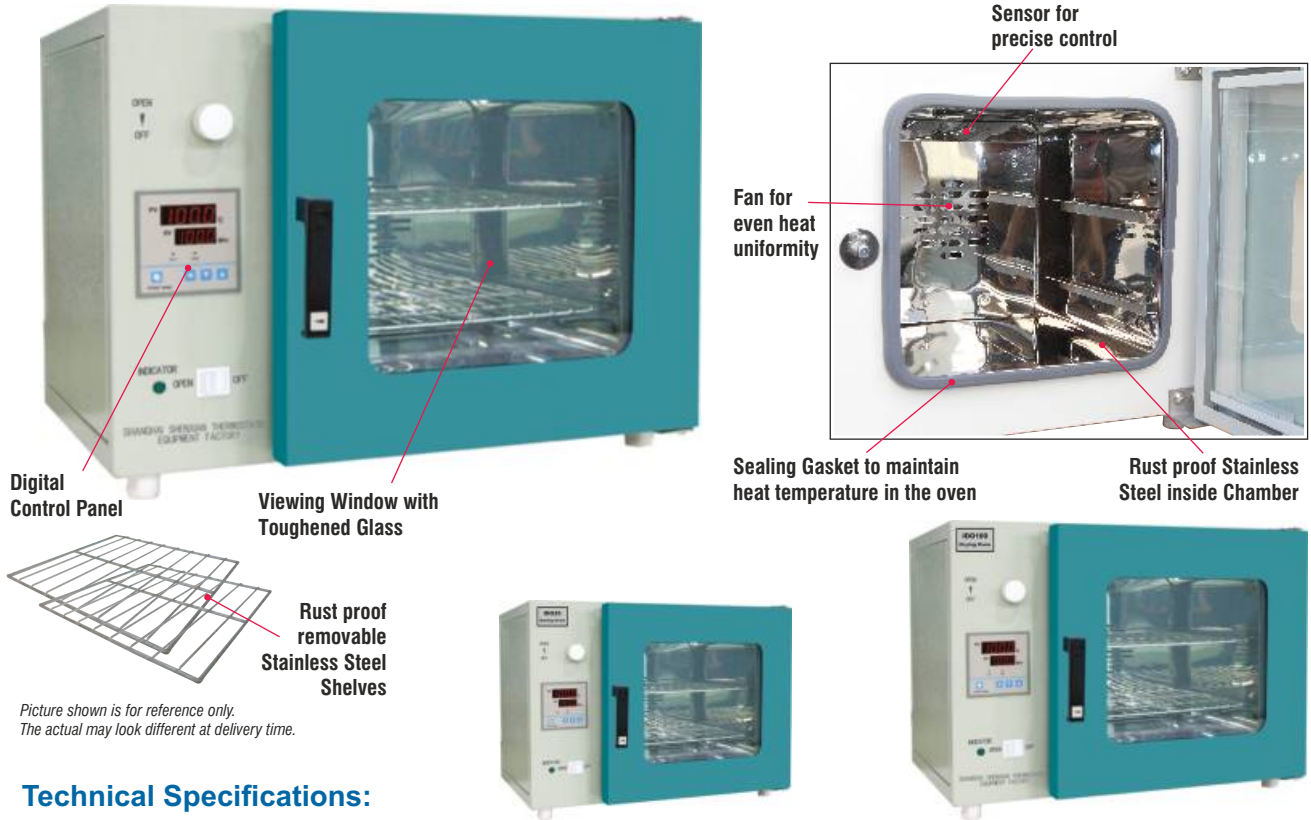

Technical Specifications:

Specifications	Model IDO25	Model IDO100
Power Supply	230 VAC, 50 Hz	230 VAC, 50 Hz
Power Consumption	500 Watt	1500 Watt
Internal Dimensions (mm)	300Wx300Dx270H (approx.)	550Wx350Dx550H (approx.)
Capacity	25 litres	100 liters
Temperature Range	Room Temperature to 250°C	Room Temperature to 250°C
Temperature Control	±5°C	±5°C
Time Range	1 ~ 9999 min	1 ~ 9999 min

Features:

- Precise PID Temperature Controller
- Inner Chamber is of Stainless Steel
- Wide view type Glass Window provided
- Fast temperature recovery after door opening
- Uniform heat distribution thru Forced-Air convection
- Over Temperature Indication Alarm
- Semicircular quadrangle design of chamber makes it easy to clean

Applications:

- Component and PCB pre-baking before soldering
- Moisture removal from electronic assemblies
- Curing adhesives and epoxies
- Widely used in drying and sterilization in bio-chemistry, agriculture and scientific research fields and environment protection.

Warranty is 12 months from the date of invoice. It excludes Heating Element, Temperature Sensor and mechanically damaged parts.

shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.