

**Digital Display, Closed Loop Temperature Control
Solder Bath: 91x135 mm size, 600 Watt heating**

Model I100-15S




Digital Display for SET & ACTUAL Temperatures



Solder Dross Remover



Anti-corrosion nanometric ceramic coating



Solder Bath size: 91x135 mm

Digitized Push Buttons for temperature control



Specifications

- Solder Bath internal dimensions: 91x135x60 mm (LxWxH) approx.
- Temperature Range: 100°C ~ 450°C
- Input Supply: 220V/50Hz
- Power consumption: 600 Watt
- Solder Pot Capacity: 5.5 kgm (approx.)
- LCD type Digital Display

Features

- Micro-controller based controls
- Closed loop temperature control
- Anti-Corrosion high temperature resistant nanometric ceramic coating on inside of Solder Bath
- In-built digital temperature calibration
- Rapid heating with stable and accurate temperature

Assured availability, normally ex-stock, of Spare Parts for Digital Solder Pot Model I100-15S



Spare Heating Element



Spare Temperature Sensor



Spare Solder Cup

**Wider Solder Bath dia of 54 mm upto 500°C, 400 Watt Lead Free Solder Pot
Anti-corrosion ceramic coating**

Model I100-6CA

Normally ex-stock availability of Spare Parts



Spare Heating Element



Spare Temperature Sensor



Anti-corrosion nanometric ceramic coating



Specifications:

- Solder Pot Size (approx.) : 54mm dia x 38mm depth
 Temperature range : 150°C ~ 500°C
 Solder Capacity : 750 gms (approx.)
 Input Supply : 220 VAC/50 Hz
 Power Consumption : 400 Watt

**36 mm dia, 200 Watt Lead Free Solder Pot with Anti-Corrosion Ceramic Coating
Model SP-200**

Normally ex-stock availability of Spare Parts



Heating Element



Temperature Sensor



Anti-corrosion nanometric ceramic coating



Specifications:

- Solder Pot Size (approx.) : 36mm dia x 30mm depth
 Temperature range : 150° ~ 500°C
 Solder Capacity : 650 gms (approx.)
 Input Supply : 220 VAC/50 Hz
 Power Consumption : 200 Watt

Warranty is 12 months from the date of invoice. It excludes all consumable parts as Heating Elements, Temperature Sensors, Solder Cups etc.

shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.



Leadfree Solder Wires (with Silver content) available from us, normally with immediate delivery


Stannol Germany provides wide range of highest quality Solder Wires for different types of soldering applications.

Solder Wires can be flux-cored or solid. The flux is necessary for the soldering process to remove oxidation and other impurities to guarantee a reliable solder joint. Flux-cored Solder Wires already contain the correct amount of flux. Different fluxes are used depending on the soldering tasks.

Halide-free Solder Wire Fluxes are used if halides are not permitted in the manufacturing process and if higher electrical safety of the residues is required.

STANNOL® Leadfree Solder Wires in HF32 series are high quality flux cored types. Activated & halide-free flux, meets **DIN EN 29454 type 1.1.3 and IEC 61190-1-3 type ROL0 standard**. Flux residues are solid and dry, and are not corrosive when tested in accordance with DIN 8516.

The halide-free Solder Wires with flux HF32 have good wetting characteristics and leave low residues on the circuit boards.

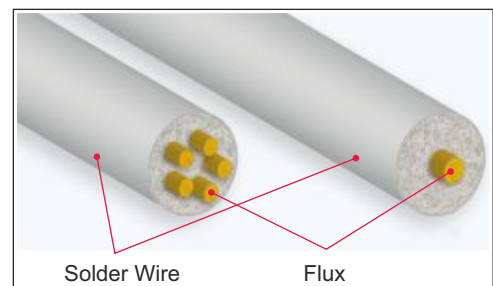

An important part of the solder wires is flux, which is responsible for the removal of oxidation from the metal surfaces. The Stannol range includes solder wires with 1 and 5 flux cores.



Lead Free Soldering Wire
Sn95Ag4Cu1, 0.3mm, 250g
Ordering No.: 631970



Lead Free Soldering Wire
Sn95Ag4Cu1, 0.5mm, 500g
Ordering No.: 631962



Lead Free Soldering Wire
Sn95Ag4Cu1, 0.7mm, 500g
Ordering No.: 631967



Lead Free Soldering Wire
Sn95Ag4Cu1, 1.0mm, 500g
Ordering No.: 631974

STANNOL® HF32 are recommended for use in both robotic soldering and hand-soldering. For manual soldering, temperature controlled Soldering Stations only should be used to prevent excessive heat being applied. Flux spatter from the formulation is fairly low. STANNOL® Solder Wire HF32 meets the requirements of DIN 8516, with respect to surface insulation resistance and electromigration. Flux residues are not corrosive to non-ferrous metals.

General Properties	Leadfree Solder Wires with Silver HF32 series
Composition	Sn95.5, Ag3.8, Cu0.7
Flux type	standard 3.5% ± 0.3 %
Halide content	none, according to DIN EN ISO 9455-6
Corrosion effect	none, according to DIN EN 29455-5 and -15
Available spool type	0.3mm in 250gms and others in 500gms

There is no warranty for these consumable items. shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.



STANNOL
Since 1879 in solder wires



Leadfree Solder Wires (without Silver content) available from us, normally with immediate delivery


Stannol Germany provides wide range of highest quality Solder Wires for different types of soldering applications.

Solder Wires can be flux-cored or solid. The flux is necessary for the soldering process to remove oxidation and other impurities to guarantee a reliable solder joint. Flux-cored solder wires already contain the correct amount of flux. Different fluxes are used depending on the soldering tasks.

Halide-free solder wire fluxes are used if halides are not permitted in the manufacturing process and if higher electrical safety of the residues is required.

STANNOL® Leadfree Solder Wires in HF32 series are high quality flux cored types. Activated & halide-free flux, meets [DIN EN 29454 type 1.1.3](#) and [IEC 61190-1-3 type ROL0 standard](#). Flux residues are solid and dry, and are not corrosive when tested in accordance with DIN 8516.

The halide-free Solder Wires with flux HF32 have good wetting characteristics and leave low residues on the circuit boards.

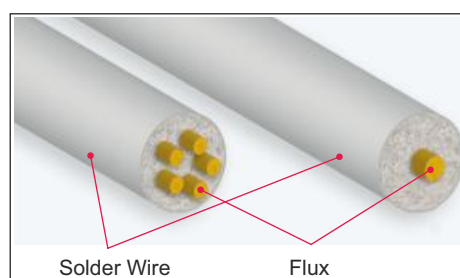

An important part of the solder wires is flux, which is responsible for the removal of oxidation from the metal surfaces. The Stannol range includes solder wires with 1 and 5 flux cores.



Lead Free Soldering Wire
Sn99Cu1, 0.5 mm, 500g
Ordering No.: 648111



Lead Free Soldering Wire
Sn99Cu1, 0.7 mm, 500g
Ordering No.: 648132



Lead Free Soldering Wire
Sn99Cu1, 1.0 mm, 500g
Ordering No.: 648108

STANNOL® HF32 are recommended for use in both robotic soldering & hand-soldering. For manual soldering, Temperature controlled Soldering Station only should be used to prevent excessive heat being applied. Flux spatter from the formulation is fairly low. STANNOL® Solder Wire HF32 meets the requirements of DIN 8516, with respect to surface insulation resistance and electromigration. The flux residues are not corrosive to non-ferrous metals.

General Properties	Leadfree Solder Wires HF32 series
Composition	Sn99, Cu 1
Flux type	standard 3.5% ± 0.3 %
Halide content	none, according to DIN EN ISO 9455-6
Corrosion effect	none, according to DIN EN 29455-5 and -15
Available spool type	500 gms

There is no warranty for these consumable items. shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.



STANNOL
Since 1879 in solder wires




Leaded Solder Wires available from us normally with immediate delivery

Solder Wires can be flux-cored or solid. The flux is necessary for the soldering process to remove oxidation and other impurities to guarantee a reliable solder joint. Flux-cored solder wires already contain the correct amount of flux. Different fluxes are used depending on the soldering task.

The HS10 series Solder Wires have rosin flux which has been proven well in application for decades. Short wetting times on common surfaces are achieved with this flux. The flux is suitable for both manual soldering and robot soldering with fast cycle times.

STANNOL® Lead containing Solder Wires in HS10 series are high quality flux cored types. Activated, halide-free flux, meets **DIN EN 29454-1 type 1.1.2B and IEC 61190-1-3 type ROM1 standard**. The flux residues are solid and dry, and are not corrosive when tested in accordance with DIN 8516.

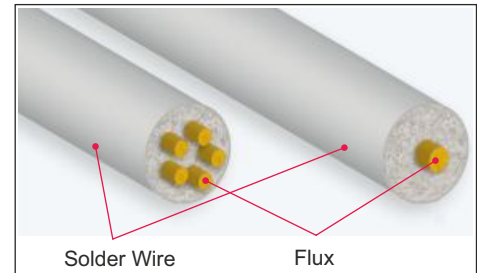

An important part of the solder wires is flux, which is responsible for the removal of oxidation from the metal surfaces. The Stannol range includes solder wires with 1 and 5 flux cores.



**Leaded Soldering Wire with 2% Silver
Sn62Pb36Ag2, 1.0 mm, 500g
Ordering No.: 626246**



**Leaded Soldering Wire
Sn60Pb40, 2.0 mm, 1000g
Ordering No.: 522242**



**Leaded Soldering Wire
Sn60Pb40, 3.0 mm, 1000g
Ordering No.: 522840**



**Leaded Soldering Wire
Sn60Pb40, 0.7 mm, 500g
Ordering No.: 519244**



**Leaded Soldering Wire
Sn60Pb40, 1.0 mm, 500g
Ordering No.: 520452**

STANNOL® HS10 Solder Wires are proven and reliable product of Stannol research. These were developed to meet high quality requirements in industrial electronic production as well as for quick rework. HS10 Solder Wires are very efficient by its high activity, which results in quick spread of solder and electrical safe residues. It is a halide activated rosin (colophony) flux. The solder wire HS10 conforms to IEC 61190-1-3 type ROM1

General Properties	Leaded Solder Wires HS10 series	HS10 series with Silver
Composition	Sn60, Pb40	Sn62, Pb36, Ag2
Flux type	standard 2.5% ± 0.3 %	
Halide content	0.9%	
Corrosion effect	none, according to DIN 8516	
Available diameters	0.7 mm, 1.0 mm, 2.0mm, 3.0mm	1.0 mm
Available spool size	0.7~1.0mm in 500 gms; 2.0~3.0mm in 1kg	500 gms

There is no warranty for these consumable items. shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.