


High Reliability 30 Volt DC Motor, Long Operational Life

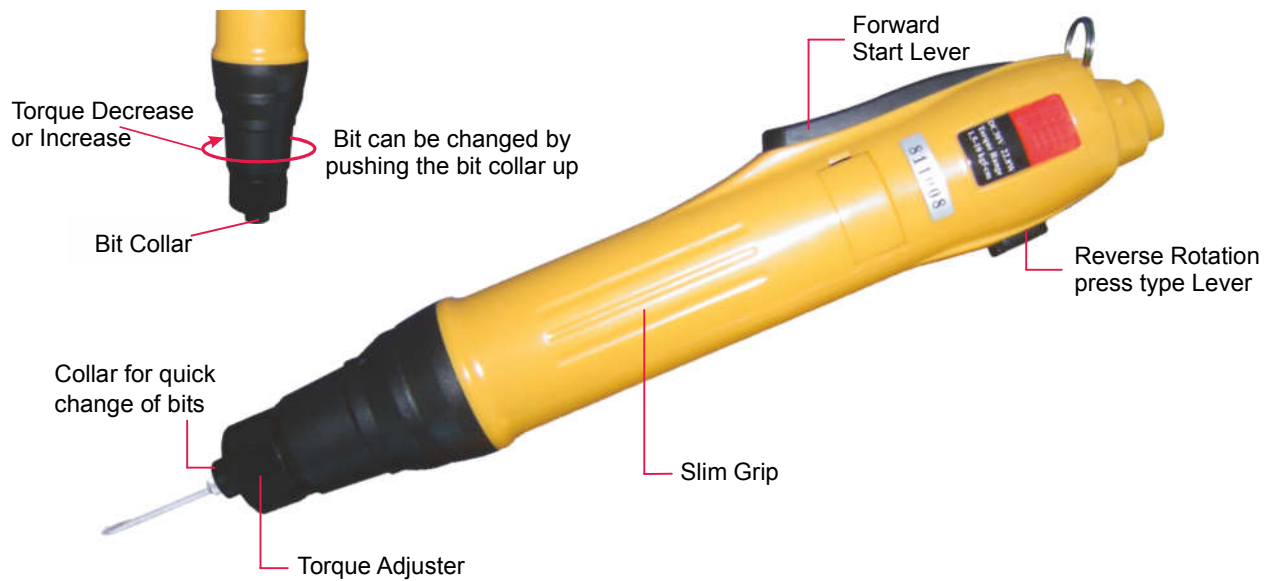

Model	IS-2000	IS-6500	IS-7000
Torque	0.2 ~ 2 Kgf-cm 0.019 ~ 0.19 Nm 0.17 ~ 1.73 lbs in	4 ~ 18 Kgf-cm 0.39 ~ 1.76 Nm 3.47 ~ 15.62 lbs in	7 ~ 22 Kgf-cm 0.68 ~ 2.15 Nm 6.07 ~ 19.1 lbs in
Screw Size	0.8 ~ 2mm	2.6 ~ 4mm	3 ~ 5mm
Speed	1000 RPM	1000 RPM	1000 RPM
Start	Lever	Lever	Lever
Length	223 mm	262 mm	262 mm
Weight	320 grams	480 grams	480 grams

Conversion Factor: 1 Nm = 10.20 Kgf cm = 8.85 lbf in

Scope of Supply

- Screwdriver
- 2 x Bits
- Power Supply

Features

- Forward/Reverse rotation feature
- Variety of interchangeable bits like Slotted, Philips, Hex, Torx

Specifications

- Power Supply : 220 VAC, 50 Hz
- Output Voltage : 30V DC
- Collet Size : 1/4" Hex

Model S-5 Power Supply

(Support all DC type electric screwdriver)

Stepless rotation speed adjustment (continuous speed variable) Power Supply



Operating Voltage : 220VAC, 50 Hz
Output Voltage : 30VDC
Dimension(mm) : 160x100x65mm (approx.)
Weight : 1600 grams (approx.)

Model S-9 Power Supply

(Support all DC type electric screwdriver)

Low/high rotation speed adjustment (2 position speed control) Power Supply



Operating Voltage : 220VAC, 50Hz
Output Voltage : 30VDC
Dimension : 170x190x50mm (approx.)
Weight : 550 grams (approx.)

shown trademarks are property of their respective owners.

Warranty is 12 months from the date of invoice. It excludes all wear & tear type parts and physically damaged parts.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.