


One single Power Supply connects to 2 Screwdrivers Model JZR-815 to lower cost

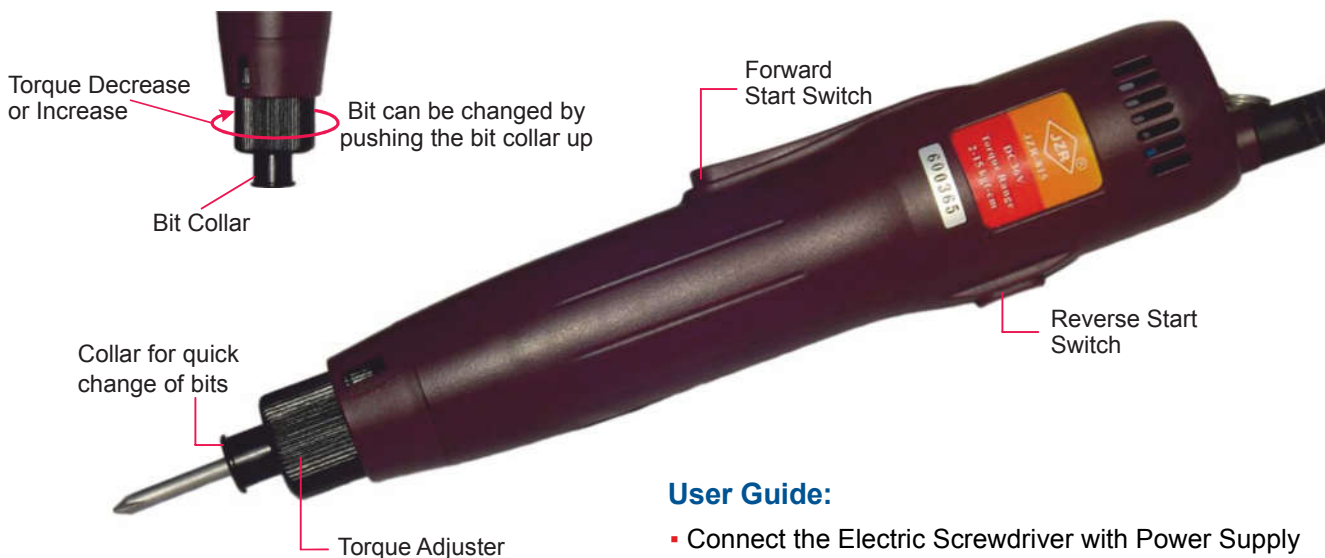

Specifications (Screwdriver)

Output Voltage (Selectable)	: 18/30/36V
RPM (Selectable)*	: 320/560/830 (rpm)
Torque range (kgf.cm)	: 2 ~ 15 kgf.cm
Applicable Screws (mm)	: 1.5 ~ 3 mm
Collet size	: 1/4 Hex
Dimensions (dia x length)	: 42m x 260mm
Noise (dB)	: <55dB
Applicable Power Supply	: JZR-02

* RPM is selectable as per selection of output voltage

User Guide:

- Connect the Electric Screwdriver with Power Supply
- Insert the Bit in the collet by pushing the collar and then lock the bit by releasing the collar
- Adjust the required torque via torque adjuster. Rotate clockwise to increase the torque and counterclockwise to decrease the torque
- Switch-on the Power supply. Select output (18/30/36V) from Power Supply. Press forward button for tightening and press reverse button for unscrew the screws.
- Once the set torque is achieved the clutch mechanism of the screwdriver starts slipping automatically.

Scope of Supply:

- 2xJZR-815 Electric Screwdriver
- 1xJZR-02 Power Supply



Power Supply Model JZR-02



2 Screwdrivers can be connected simultaneously

Specifications (Power Supply)

Power Supply	: 220VAC
Output voltage	: 18/30/36V
Power Consumption	: 55 Watt
No. of outputs	: 2 outlets

Important Notes:

- Be sure to use this Electric Screwdriver with dedicated Power Supply only.
- Do not operate with wet or oily hands
- Avoid beating and hitting the electric Screwdriver to avoid malfunction
- Do not operate in high temperature, humid or near flammable and explosive atmosphere
- When not in use un-plug the screwdriver from power supply to increase the life of screwdriver

shown trademarks are property of their respective owners.

While the information contained herein in, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.